


BT Flange End Mill Holders

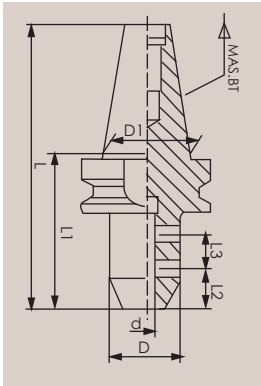

Features:
Suitable for CNC RPM≥12000
RPM≥20000 balance
toolholders are available

Inch

Stock No.	Tapper	d(in)	L1(mm)	L(mm)	D(mm)	D1(mm)	L2(mm)	L3(mm)
1171-3001	BT30	1/4"	60	108.4	27	31.75	12	
1171-3002	BT30	5/16"	60	108.4	30	31.75	16	
1171-3003	BT30	3/8"	60	108.4	32	31.75	19	
1171-3004	BT30	1/2"	60	108.4	35	31.75	22	
1171-3005	BT30	5/8"	75	123.4	41	31.75	23	
1171-3006	BT30	3/4"	75	123.4	44.5	31.75	25	
1171-3007	BT30	1"	90	138.4	55	31.75	28	25.4
1171-4001	BT40	1/4"	50	115.4	27	44.45	12	
1171-4002	BT40	5/16"	50	115.4	30	44.45	16	
1171-4003	BT40	3/8"	63	128.4	32	44.45	19	
1171-4004	BT40	1/2"	63	128.4	35	44.45	22	
1171-4005	BT40	5/8"	63	128.4	41	44.45	23	
1171-4006	BT40	3/4"	63	128.4	44.5	44.45	25	
1171-4007	BT40	1"	100	165.4	55	44.45	28	25.4
1171-4008	BT40	1-1/4"	100	165.4	62	44.45	28	25.4
1171-5001	BT50	1/4"	63	164.8	27	69.85	12	
1171-5002	BT50	5/16"	63	164.8	30	69.85	16	
1171-5003	BT50	3/8"	63	164.8	32	69.85	19	
1171-5004	BT50	1/2"	80	181.8	35	69.85	22	
1171-5005	BT50	5/8"	80	181.8	41	69.85	23	
1171-5006	BT50	3/4"	80	181.8	44.5	69.85	25	
1171-5007	BT50	1"	100	201.8	55	69.85	28	25.4
1171-5008	BT50	1-1/4"	105	206.8	62	69.85	28	25.4
1171-5009	BT50	1-1/2"	105	216.8	38	69.85	28	25.4

Metric

Stock No.	Tapper	d(m)	L1(mm)	L(mm)	D(mm)	D1(mm)	L2(mm)	L3(mm)
1172-3001	BT30	6	50	98.4	25	31.75	18	
1172-3002	BT30	6	60	108.4	25	31.75	18	
1172-3003	BT30	8	60	108.4	28	31.75	18	
1172-3004	BT30	10	60	108.4	35	31.75	20	
1172-3005	BT30	10	80	128.4	35	31.75	20	
1172-3006	BT30	12	60	108.4	42	31.75	22.5	
1172-3007	BT30	14	60	108.4	42	31.75	22.5	
1172-3008	BT30	16	75	123.4	48	31.75	24	
1172-3009	BT30	18	75	123.4	50	31.75	24	
1172-3010	BT30	20	75	123.4	52	31.75	25	
1172-3011	BT30	25	90	138.4	65	31.75	24	25
1172-4001	BT40	6	50	115.4	25	44.45	18	
1172-4002	BT40	6	60	125.4	25	44.45	18	
1172-4003	BT40	8	50	115.4	28	44.45	18	
1172-4004	BT40	10	63	128.4	35	44.45	20	
1172-4005	BT40	12	63	128.4	42	44.45	22.5	
1172-4006	BT40	14	63	128.4	44	44.45	22.5	
1172-4007	BT40	16	63	128.4	48	44.45	24	
1172-4008	BT40	16	70	135.4	48	44.45	24	
1172-4009	BT40	18	63	128.4	50	44.45	24	
1172-4010	BT40	20	63	128.4	52	44.45	25	
1172-4011	BT40	20	70	135.4	52	44.45	25	
1172-4012	BT40	25	90	155.4	65	44.45	24	25