


## BT Shank to Morse Taper adaptors( with Tang)

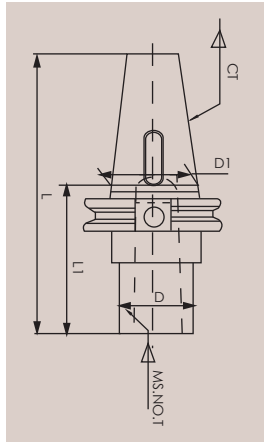

Inch

Stock No.	Tapper	Morse Tapper Hole	L1 (inch)	D(inch) Nose Dia
1178-4001	CT40	MT2	2.375"	1.25"
1178-4002	CT40	MT3	3.00"	1.562"
1178-4003	CT40	MT4	2.562"	2.00"
1178-5001	CT50	MT2	1.75"	1.25"
1178-5002	CT50	MT3	1.75"	1.562"
1178-5003	CT50	MT4	3.00"	2.00"
1178-5004	CT50	MT5	4.125"	2.75"

Metric

Stock No.	Tapper	Morse Tapper Hole	L1 (mm)	L (mm)	D (mm) Nose Dia
1179-4001	CT40	MT1	45	113.25	25
1179-4002	CT40	MT2	63	131.25	32
1179-4003	CT40	MT3	75	143.25	40
1179-4004	CT40	MT4	100	168.25	48
1179-4501	CT45	MT1	40	122.55	25
1179-4502	CT45	MT2	50	132.55	32
1179-4503	CT45	MT3	73	155.55	40
1179-4504	CT45	MT4	95	177.55	48
1179-4505	CT45	MT5	125	207.55	61
1179-5001	CT50	MT1	40	141.6	25
1179-5002	CT50	MT2	50	151.6	32
1179-5003	CT50	MT2	135	236.6	32
1179-5004	CT50	MT3	63	164.6	40
1179-5005	CT50	MT3	150	251.6	40
1179-5006	CT50	MT4	65	166.6	48
1179-5007	CT50	MT4	85	186.6	48
1179-5008	CT50	MT5	105	206.6	61

Features: Suitable for CNC RPM≥12000 RPM≥20000 balance toolholders are available

# HITECH<sub>(Qingdao)</sub> ENTERPRISES INC