


1026-0125...0160,1026(F58) VER./HOR.DIVIDING HEAD

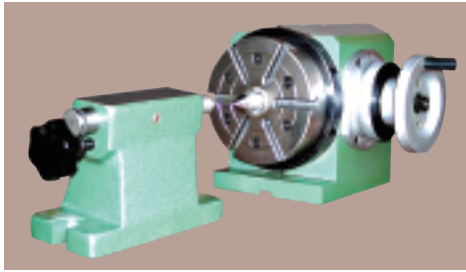

1026(F58) manually operated indexer, which can be mounted either vertically or horizontally, is mainly used on milling and boring machines. With non-lifting Hirth coupling indexing, it features high accuracy and perfect rigidity. One scroll chuck "K11160" is equipped besides the indexer.

Main specifications

Specifications	Items	1026-0125(F58125)	1026-0160(F58160)
Center height mm		125	160
Divisions		2、3、4、6、8、12、24	2、3、4、6、8、12、24
Table diameter mm		φ 160	φ 160
Thickness with table horizontal mm		210	210
Taper of spindle bore		MT3	MT3
Width of the locating key mm		18	18
Width of T-slot mm		10	10
Indexing accuracy		30"	30"
Load capacity of Hor.Spindle Kg		50	50
Net weight Kg		67	-
Gross weight Kg		77	-
Case dimensions mm		580X385X353	-

HITECH (Qingdao)
ENTERPRISES INC