


1026-0125...0160, 1026 (F58) 型手动立卧等分分度头

1026-0125...0160, 1026(F58) VER./HOR.DIVIDING HEAD

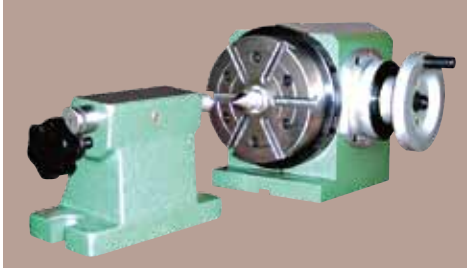

1026(F58)型手动立卧等分分度头是磨床、钻床等的主要附件之一，精度高，刚性好，可将工件分成2、3、4、6、8、12、24等分。主轴上还可配备K11160K卡盘。

1026(F58) manually operated indexer, which can be mounted either vertically or horizontally, is mainly used on milling and boring machines. With non-lifting Hirth coupling indexing, it features high accuracy and perfect rigidity.

One scroll chuck "K11160" is equipped besides the indexer.

主要规格和参数: Main specifications

规格 Specifications		项目 Items	1026-0125(F58125)	1026-0160(F58160)
中心高	Center height mm		125	160
可分等分数	Divisions		2、3、4、6、8、12、24	2、3、4、6、8、12、24
工作台直径	Table diameter mm		φ 160	φ 160
分度头总厚度	Thickness with table horizontal mm		210	210
主轴孔锥度	Taper of spindle bore		MT3	MT3
定位键宽度	Width of the locating key mm		18	18
"T"型槽宽度	Width of T-slot mm		10	10
分度精度	Indexing accuracy		30"	30"
主轴水平时锁紧力矩	Load capacity of Hor.Spindle Kg		50	50
净重	Net weight Kg		67	-
毛重	Gross weight Kg		77	-
箱体尺寸	Case dimensions mm		580X385X353	-

HITECH (Qingdao) ENTERPRISES INC